



? WJZS` [US^>aSV
7` ZS` UW

BdVgUf1 Sds` rk

>f` WsdBal` Wd
l Sds` rk

3` ^gS`6WdSVfja`
AhdWk` l` A` g
A` t`



QUALITY™
Continuous Quality Assurance

66HL4M-(V) 610-635 Watt

Mechanical Characteristics

5W*FkbW	@ žrkbW? a` a žJkfeS^f W
@ažaxUW*e	#%\$/ (° \$fi
6[W e[a` e	\$\$ \$° ##%&° % _ _
I WYZf	\$*ž\$]Y
8d` f 9`See	%ž\$ _ ! 3` f[ždW VUf[a` 5aSf[YI [YZ FdS` e_ [ee[a` ! >ai :d` ! FV_ bWVW 9`See
8dS_ W	3` aV[! VV 3`g_ [[g_ 3`ak
<g` Uf[a` 4aj	;B`* DSfVW
Bd`fWUf[a` 5`See	5`See;;
:75 8[dWfkbW	5`See5
5a` ` WUfadFkbW	<=" %? !? 5&! AfZVde
Agfbgf 5ST Wđ	&Z` _ _ /t:fi &" _ _ !/žj \$" _ _ ad5gefa_ ! W >W YfZ

Packaging Configuration

BS^W 6[W e[a` e	\$(+ (° ##"° #S` # _ _
BSU[[Y VWS[^ /Fi a bS^W e/A` WefSU] fi	%# bUe! bS^W e! (\$ bUe! efSU] ! ("\$ bUe! &" r: C 5a` fS[Wđ


Specifications (STC)

? S] [g_ Bai Wđ B_ Sj M bO	(#" (#' (\$' (\$' (%' (%'
? S] [g_ Bai Wđ Ha` fSYW H_ b MIO	&" ž (&" ž) % &" ž+ " &#ž') &#ž\$% &#ž!+
? S] [g_ Bai Wđ 5gdW f ;_ b MIO	#` ž & #` ž# #` ž#(#` ž\$ \$ #` ž\$* #` ž!&
A bW žU[d]g[f Ha` fSYW HaU MIO	&* ž! % &* ž) + &* ž' &+ž## &+ž\$) &+ž&%
E Z ad žU[d]g[f 5gdW f :eU MIO	#(ž # #(ž * # (ž# # (ž\$ \$ # (ž\$+ # (ž!)
? aVg W7 U[W Uk EF5 M O	\$\$ž * \$\$ž) \$\$ž+ ' \$\$ž& \$\$ž!\$ \$\$ž! #
Bai Wđ Fa` WđS` UW	" p ž %
FV_ bVđSfgdW5aW U[W feaXB_ Sj	ž ž\$` , !, 5
FV_ bVđSfgdW5aW U[W feaXHaU	ž ž\$` , !, 5
FV_ bVđSfgdW5aW U[W feaXeU	" ž &` , !, 5

Application Conditions

A bVđSf[Y FV_ bVđSfgdW	ž&" , 5 p ž) , 5
? S] [g_ EkefW_ Ha` fSYW	#" " !# " " H65 / 75fi
? S] [g_ EVđWđ 8geWDSf[Y	% 3

Engineering Drawings

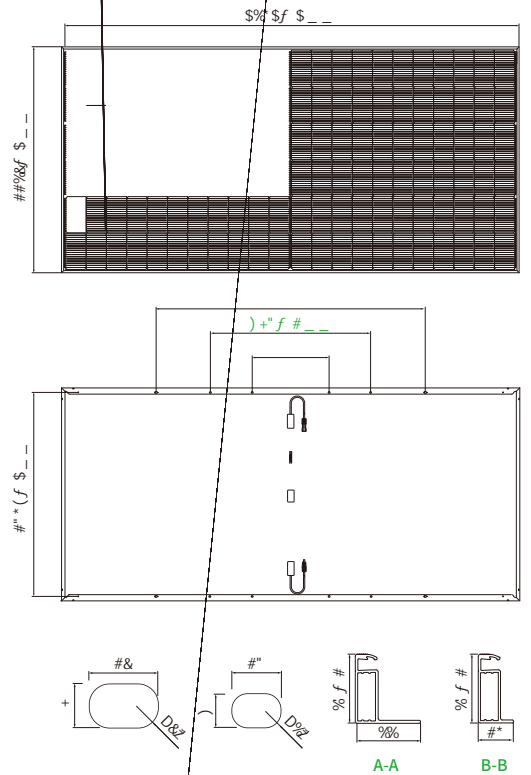

Electrical Performance

